



Cooling only




Cooling and Heating

Optional Voltage 220-240V/50Hz
Optional Refrigerant R22

Product No 02

Product No 22

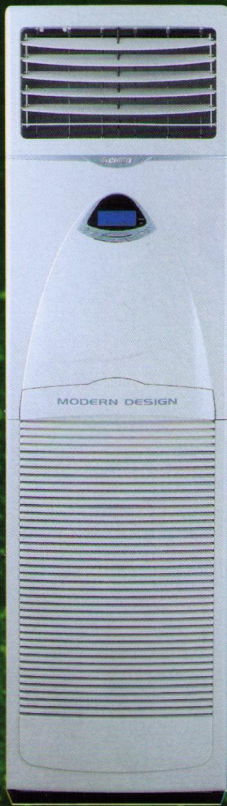

Floor Standing Type

Product No

R22

R410A

02	CF-51C3-H	CF-51A3-H	CF-61C3-B	CF-61A3-B	CF-72C3-G	CF-72A3-G
22	CF-72C6-G	CDF-72A6-G	CF-75C3-C	CDF-75A3-C	CF-75C6-C	CF-120A6A-E
	CF-120C6-E	CDF-120A6-E	CDF-75A6-C			

R22			CF-51C3-H	CF-61C3-B	CF-72A3A-G	CF-72C6-G	CF-75C3-C	CF-75C6-C	CF-120C6-E	CF-72A3A-G	CF-120A6A-E
Model			CF-51A3-H	CF-61A3-B		CDF-72A6-G	CDF-75A3-C	CDF-75A6-C	CDF-120A6-E		
Power Supply	V/Hz/Ph		220-240/50/1	220-240/50/1	220-240/50/1	380-415/50/3	220-240/50/1	380-415/50/3	380-415/50/3	220-240/50/1	380-415/50/3
Capacity	Cooling	Btu/h	18000	22000	25000	25000	26000	26000	42000	25000	42000
		W	5100	6100	7200	7200	7500	7500	12000	7200	12000
Heating	Btu/h		19700	24100	26700	26700	28400	28400	46100	26700	46100
	W		5610	6710	7700	7700	8200	8200	13200	7700	13200
Power input	Cooling	W	1925	2300	2825	2825	2940	2940	4705	2825	4705
	Heating	W	1700	2290	2650	2530	2750	2700	4650	2650	4650
Operating Current	Cooling	A	9.0	10.8	13.2	6.2	13.8	6.1	10.3	13.2	10.3
	Heating	A	8.0	10.7	12.4	5.5	12.5	5.7	10.1	12.4	10.1
EER	W/W		2.6	2.7	2.5	2.5	2.6	2.6	2.6	2.5	2.6
COP	W/W		3.3	2.9	2.9	3.0	3.0	3.0	2.8	2.9	2.8
Air Flow	Indoor unit	m ³ /h	900	800	1100	1100	1150	1150	1800	1100	1800
Noise level	Indoor unit	dB (A)	43	48	47	47	49	49	54	47	54
	Outdoor unit	dB (A)	54	57	57	57	59	59	62	57	62
Net Dimension (WxHxD)	Indoor unit	mm	480x1652x210	480x1652x230	480x1652x230	480x1652x230	520x1725x225	520x1725x225	600x1868x313	480x1652x230	600x1868x313
	Outdoor unit	mm	795x540x255	870x700x310	870x700x310	870x700x310	900x835x330	900x835x330	1000x990x350	870x700x310	1000x990x350
Net Weight	IDU/ODU	Kg	33/40	38/56	38/56	38/56	39/65	39/65	61/98	38/56	61/98
Package Dimension (WxHxD)	Indoor unit	mm	1850x575x360	1850x575x360	1850x575x360	1850x575x360	1910x620x415	1910x620x415	2050x695x485	1850x575x360	2050x695x485
	Outdoor unit	mm	920x595x335	990x780x410	990x780x410	990x780x410	1030x960x440	1030x960x440	1145x1120x475	990x780x410	1145x1120x475
Gross Weight	IDU/ODU	Kg	44/43	49/60	49/60	49/60	51/70	51/70	75/106	49/60	75/106
Loading Capacity	40"HQ	Set	110	82	82	82	65	65	48	82	48

CHIGO reserves the right to change or modify the specifications and design of its products (any product) without notice.